


# CO<sub>2</sub> EMISSIONS REDUCTION STEPS

## Natural gas heat and hot water

Improvements to reduce carbon dioxide emissions, ranked in order of cost effectiveness





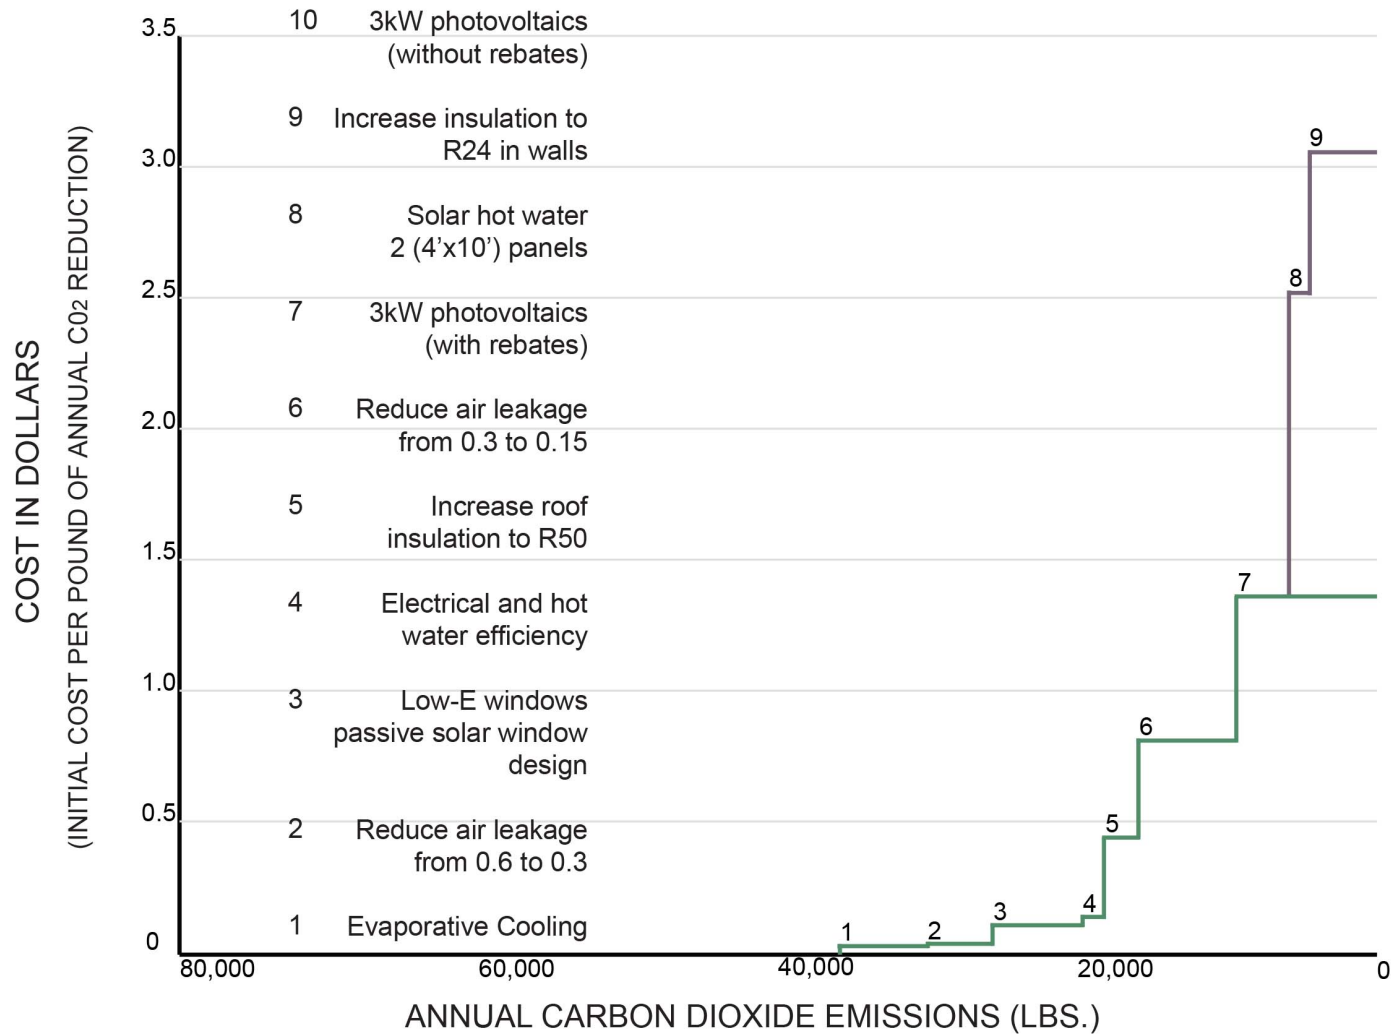

## STEPS TO LOWER CARBON EMISSIONS


**Fuel Type:** Natural Gas Heating and Hot Water  
**Location:** Boulder, CO

**Code-Minimum House:** The base design for analysis is a 2400 sq. ft. house with a full walkout basement and air conditioning. The base is the minimum that would pass the 2003 IECC code and Boulder Green Points program.

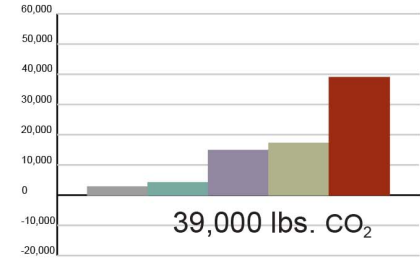


### STEP 1 EVAPORATIVE COOLING

Evaporative cooling uses one-fourth the energy of typical air-source air conditioning, with a lower initial cost.

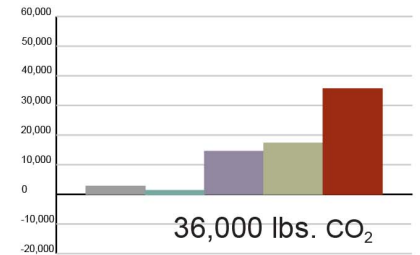


### STEP 2 REDUCE AIR LEAKAGE

Blower door testing with caulking and sealing of the building can reduce the air leakage -- the amount of outside air to be heated and cooled. Spray insulations, such as wet-blown cellulose and icynene, reduce air leakage by filling gaps in the framing. An initial reduction from 0.6 air changes per hour to 0.3 is easily attainable in both new and existing buildings.

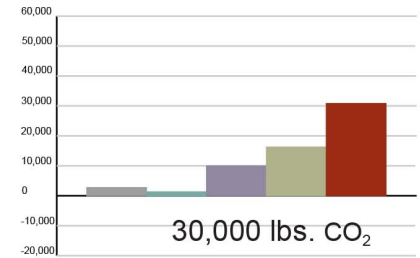

### STEP 3 LOW E WINDOWS, PASSIVE SOLAR TEMPERED


Changing the glass to double low-E reduces both heating and cooling loads. In this step, we have increased the South glazing to 8% of the floor area. The South glass has a high solar heat gain coefficient (0.6) -- allowing 60% of the heat from the sun into the building during winter months and reducing our heating load.

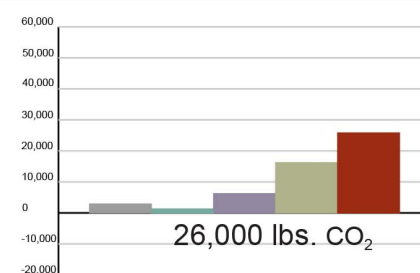




## STEPS TO LOWER CARBON EMISSIONS

**Fuel Type:** Natural Gas Heating and Hot Water  
**Location:** Boulder, CO




### STEP 4 ELECTRICAL AND HOT WATER EFFICIENCY

Use Energy Star labeled appliances and electronically ballasted fluorescent lighting. Hot water use can be minimized with low-flow fixtures and efficient delivery systems.

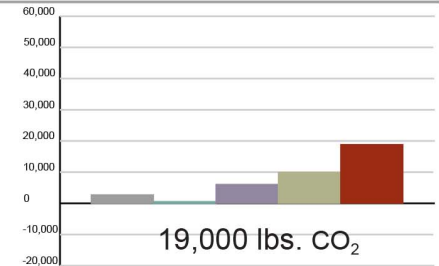


### STEP 5 INCREASE ROOF INSULATION TO R-50

Typical roof construction often has a large enough cavity to allow increasing the amount of insulation from the R-38 typically required by code to R-50.

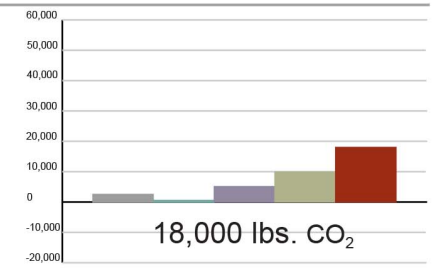


### STEP 6 REDUCE AIR LEAKAGE TO 0.15 ACH

Further caulking and sealing in new construction can lower the air leakage to 0.15 air changes per hour. At these low levels of leakage an air-to-air heat recovery ventilator is typically added to ensure good indoor air quality.

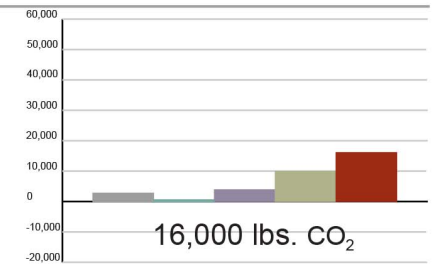

### STEP 7 PHOTOVOLTAIC PANELS


With the Xcel rebates, photovoltaic energy supply is more cost-effective in terms of reducing CO2 emissions than super-insulation or efficiency measures. At this point, the strategy switches from load reduction to renewable supply.

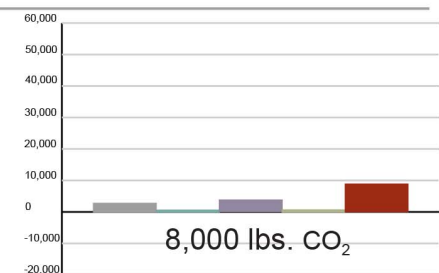




## STEPS TO LOWER CARBON EMISSIONS

**Fuel Type:** Natural Gas Heating and Hot Water  
**Location:** Boulder, CO




### STEP 8 SOLAR THERMAL DOMESTIC HOT WATER

Solar hot water panels are cost effective in reducing CO<sub>2</sub> emissions. A two-panel system will provide almost all of the domestic hot water needed for a typical family.

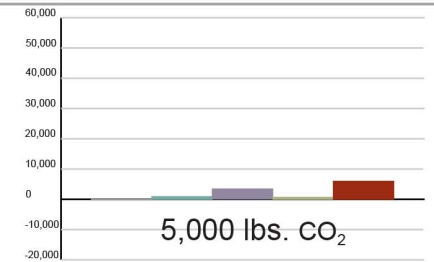

### STEP 9 INCREASED INSULATION

Increasing the insulation levels in walls to R-24 and basements to R-19 will continue to lower natural gas use.

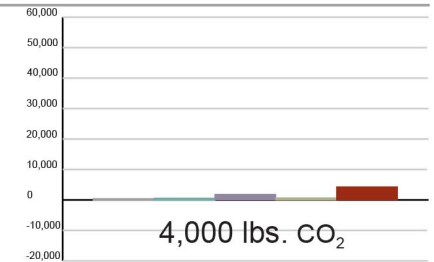

### STEP 10 PHOTOVOLTAIC PANELS WITHOUT REBATES

At current market costs, photovoltaic energy is still less expensive than extreme load reduction measures such as triple low-E windows or R-50 walls. We also find it to be a better value in most cases than using solar thermal panels for building heat. Finally, we expect the cost of PV energy to decline in the future relative to fossil fuels as the technology becomes widespread and demand for fossil fuels outstrips supply.